





SERFILCO®

Chemical resistant pumps & filters engineered for industry

BULLETIN
F-517
04/08/19
Page 1 of 2

'PLBHE' HI-FLOW FILTRATION SYSTEMS

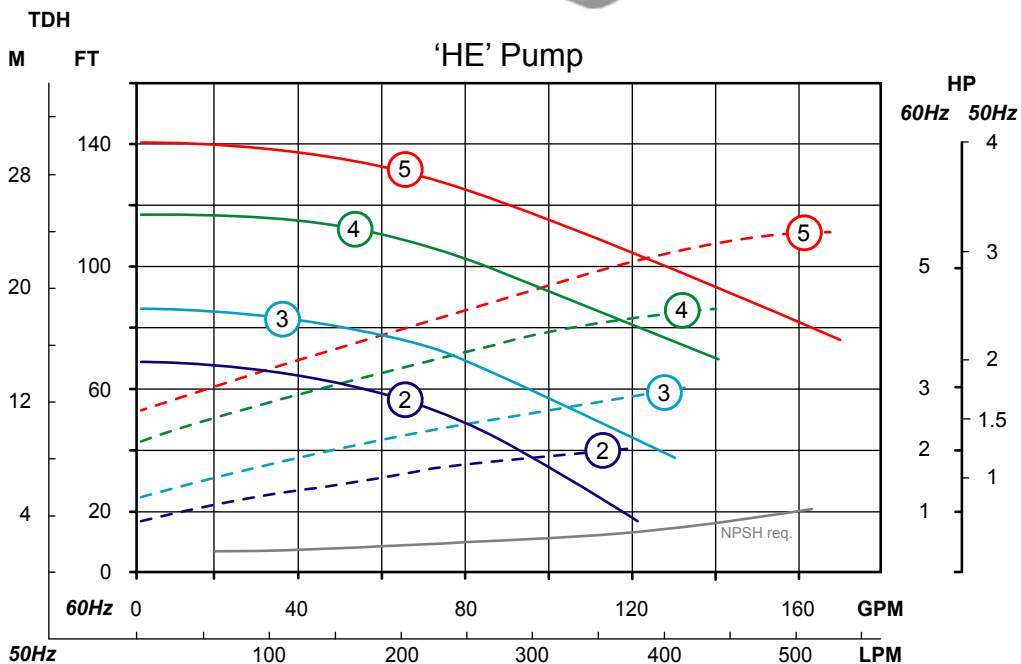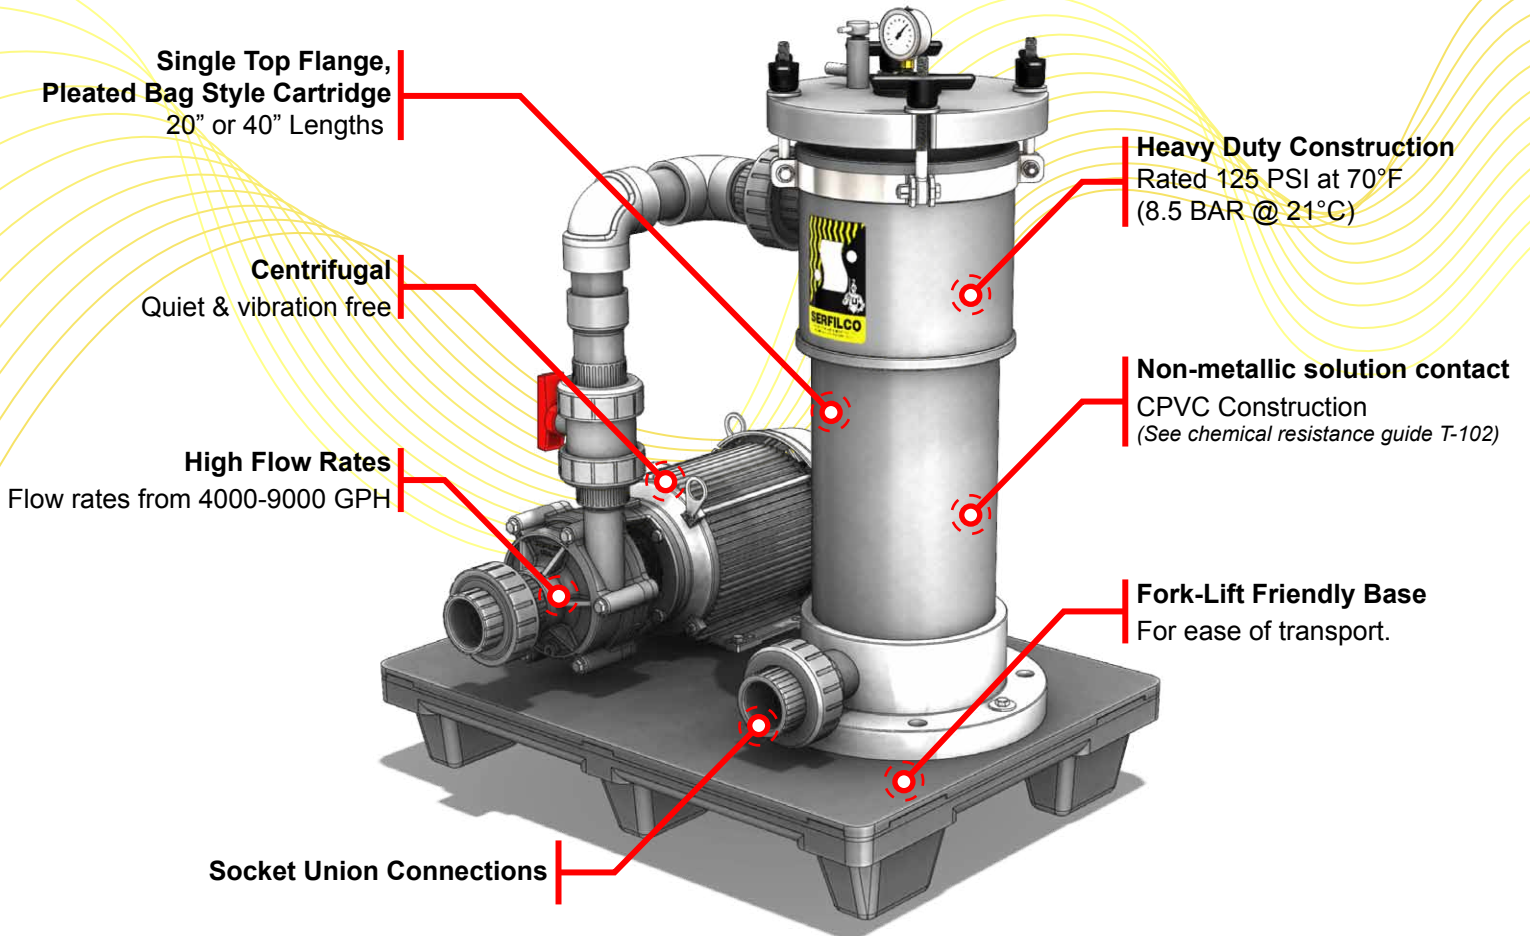



'PLBHE' HI-FLOW FILTRATION SYSTEMS




STANDARD CONFIGURATIONS

CURVE NO.	MODEL NUMBER	FLOW RATE (GPH)	CONNECT. SOC UNION	MATERIAL	FILTER LENGTH	PUMP
2	S-PLB20HE220	4000	2" x 2"	CPVC / EPDM	20"	2.0 HP
2	S-PLB40HE220	4000	2" x 2"	CPVC / EPDM	40"	2.0 HP
3	S-PLB20HE330	6000	2" x 2"	CPVC / EPDM	20"	3.0 HP
3	S-PLB40HE330	6000	2" x 2"	CPVC / EPDM	40"	3.0 HP
4	S-PLB20HE450	7500	2" x 2"	CPVC / EPDM	20"	5.0 HP
4	S-PLB40HE450	7500	2" x 2"	CPVC / EPDM	40"	5.0 HP
5	S-PLB40HE575	9000	2" x 2"	CPVC / EPDM	40"	7.5 HP

Standard systems include single mechanical seal pump.

For double mechanical seal, add 'D' after 'HE'.

For FKM Elastomers, add '-V' to PCN

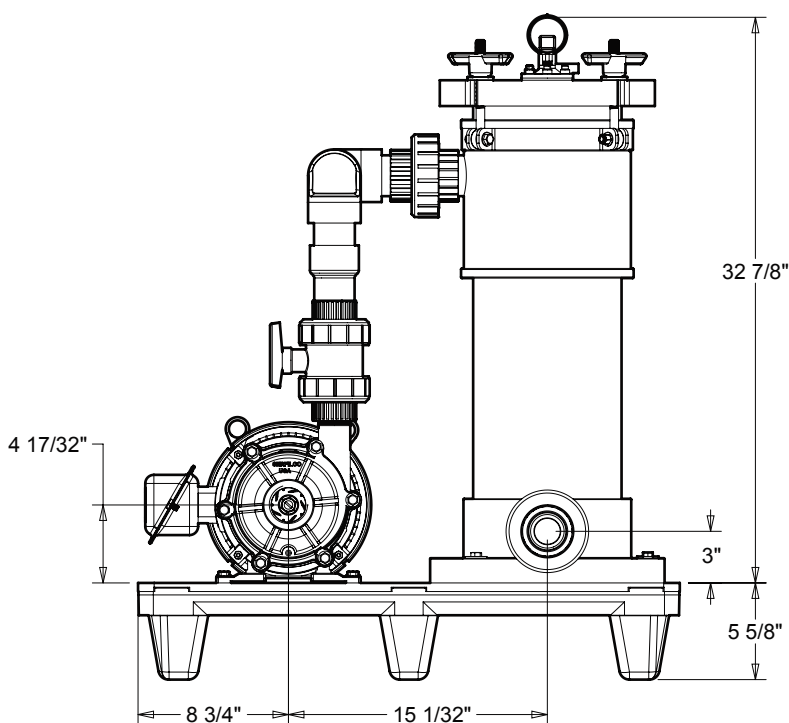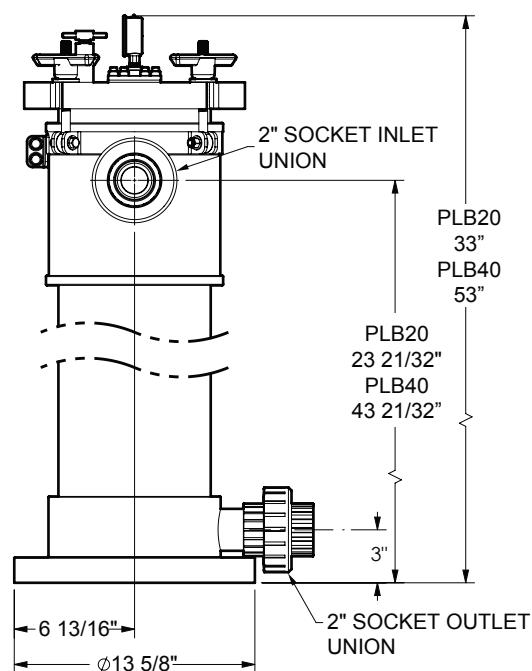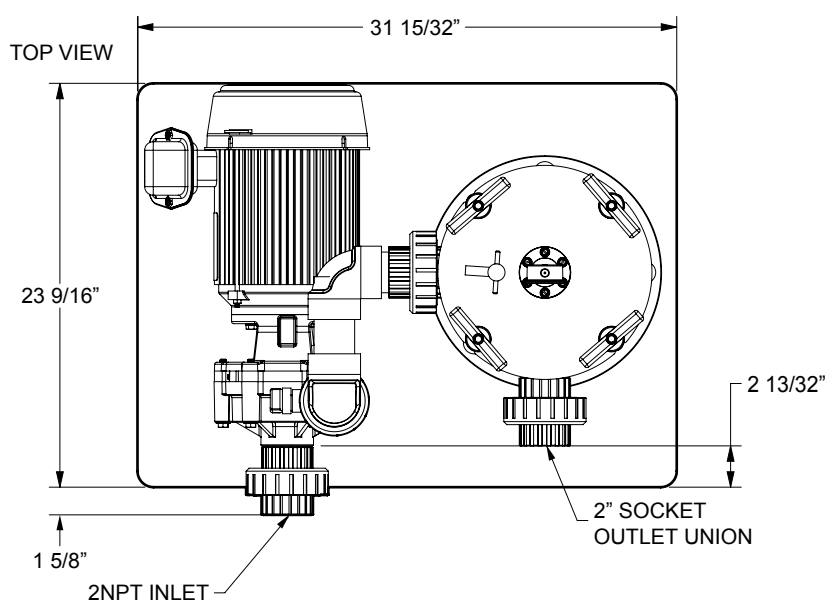

REPLACEMENT MEDIA

MICRON RATING	20" LENGTH FILTER	40" LENGTH FILTER
1µm	SF-PL-PHFU1U20U	SF-PL-PHFU1U40U
5µm	SF-PL-PHFU5U20U	SF-PL-PHFU5U40U
10µm	SF-PL-PHFU10U20U	SF-PL-PHFU10U40U
20µm	SF-PL-PHFU20U20U	SF-PL-PHFU20U40U



PL-PHFU1U20

PL-PHFU1U40

PH: (800) 323-5431

EMAIL: SALES@SERFILCO.COM

SERFILCO.COM